


INTERPLY REQUIRED FOR
15 & 20 YEAR SYSTEMS

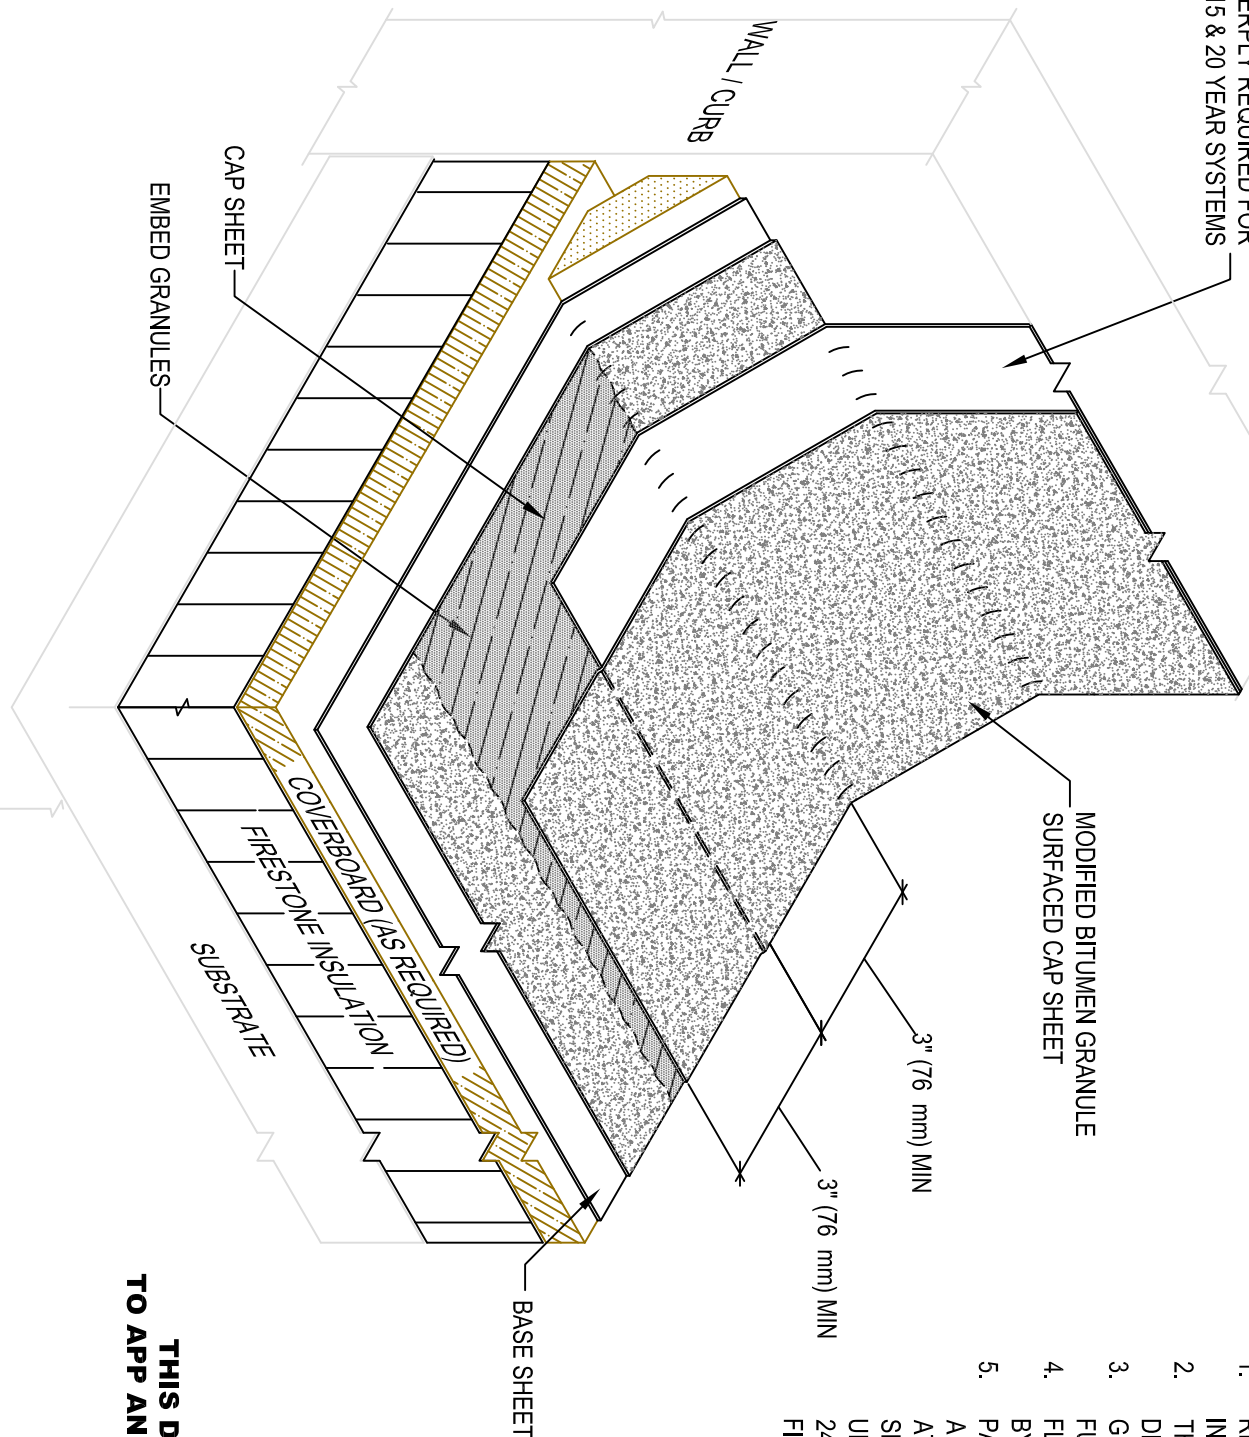

MODIFIED BITUMEN GRANULE
SURFACED CAP SHEET

3" (76 mm) MIN

3" (76 mm) MIN

BASE SHEET

COVERBOARD AS REQUIRED
FIRESTONE INSULATION

SUBSTRATE

CAP SHEET
EMBED GRANULES

WALL / CURB

NOTES:

1. REFER TO FIRESTONE WEBSITE FOR MOST CURRENT INFORMATION.
2. THIS DETAIL SHOULD BE USED ONLY WHERE THE DECK IS SUPPORTED BY THE OUTSIDE WALL.
3. GRANULES MUST BE EMBEDDED WHEN THERMALLY FUSING GRANULE SURFACED CAP SHEET.
4. FLASHING LAPS MUST BE OFFSET FROM FIELD LAPS BY A MINIMUM OF 12" (305 mm).
5. PARAPETS WITH NAILABLE SUBSTRATES MUST HAVE A FIRESTONE BASE SHEET MECHANICALLY ATTACHED IN ACCORDANCE WITH THE FOLLOWING SPACING:

| | |
|------------------------|--|
| UP TO 24" (305-610 mm) | 9" (152 mm) ON CENTERS |
| 24-36" (610-914 mm) | 6" (228 mm) ON CENTERS |
| FIELD OF WALL | ONE PER FT ² (929 cm ²) |

**THIS DETAIL APPLIES
TO APP AND SBS MEMBRANES**

MAXIMUM WARRANTY: **20 YEARS**

Firestone
BUILDING PRODUCTS
NOBODY COVERS YOU BETTER.[™]
www.firestonebpc.com

BASE TIE-IN - TORCH APPLIED
ASPHALT SYSTEMS
ACCEPTABLE SYSTEMS: MODIFIED BITUMEN

ISSUE/REVISION
DATE: 7/02/2014
NOT TO SCALE

DETAIL NO.
MB-BT-14