


## QuickSeam™ Curb Flashing

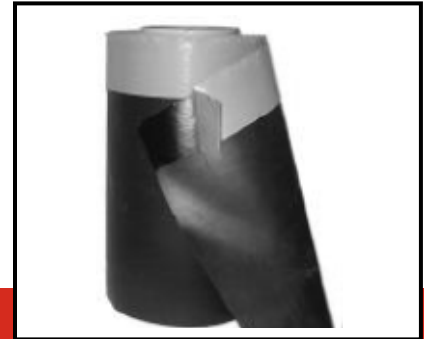

### Item Description

QuickSeam Curb Flashing

### Item Number

W56RAC1622

## Product Information

### Description:

QuickSeam Curb Flashing is 18" (457.2 mm) wide 60 gauge non-reinforced RubberGard™ membrane with 3.0" (76.2 mm) wide tape factory laminated along one edge. The 3.0" (76.2 mm) tape portion is used to splice the QuickSeam Curb Flashing to the roof membrane. The balance of the QuickSeam Curb Flashing is applied to the vertical surface with Firestone EPDM Bonding Adhesive BA-2004 (W563587052) or Water-Based Bonding Adhesive (W563587038) to hold the membrane in place and terminate using an approved termination detail.

### Method of Application:

1. Use Firestone QuickPrime™ Plus (3 gal: W563587044) and QuickScrubber Kits (pads and handles: W563582045) to clean and prime membrane area to receive tape.
2. Refer to Firestone Specification and Details.
3. Application temperature range is between -10 °F (-23 °C) and 120 °F (49 °C).
4. Refer to the firestone website (firestonebpco.com) for application instructions.

### Storage:

- Store in original unopened containers indoors at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Do not store on roof in direct sunlight or at temperatures above 80 °F (26.7 °C).
- When exposed to lower temperatures; restore to room temperature prior to use.

### Shelf Life:

- Shelf life of one year can be expected when stored in original container at temperatures between 60 °F (15.6 °C) and 80 °F (26.7 °C).
- Shelf life will be shortened if exposed to elevated temperatures.

### Precautions:

Refer to Safety Data Sheet (SDS).

### LEED® Information:

Post Consumer Recycled Content: 0%  
Post Industrial Recycled Content: 0%  
Manufacturing Location: Prescott, AR

\*NOTE: LEED® is a registered trademark of the U.S. Green Building Council.

# TECHNICAL INFORMATION SHEET

## QuickSeam™ Curb Flashing

### Packaging

<u>Length</u>	<u>Quantity Per Carton</u>	<u>Pallet</u>
50' (15.25 m)	1	24

\*NOTE: QuickScrubber Kits (pads and handles) are included in each carton.

### Typical Properties: QuickSeam Tape

<u>Property</u>	<u>QuickSeam Tape</u>	<u>EPDM Membrane</u>
Base	Rubber Polymers	EPDM, Non-reinforced
Color	Black	Black
Solvents	None	None
Solids	100%	100%
Cured State	Cured	Cured
Thickness	0.030" (0.635 mm) ± 0.005" (0.127 mm)	0.060" (1.52 mm) ± 0.005" (0.127mm)
Width	3.0" (77 mm)	18.0" (457.2 mm)

Please contact Quality Building Services Technical Department at 1-800-428-4511 for further information.

*This sheet is meant to highlight Firestone products and specifications and is subject to change without notice. Firestone takes responsibility for furnishing quality materials which meet published Firestone product specifications or other technical documents, subject to normal roof manufacturing tolerances. Neither Firestone nor its representatives practice architecture. Firestone offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Firestone accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Firestone representative is authorized to vary this disclaimer.*