

TECHNICAL INFORMATION SHEET


QuickSeam™ Yellow Safety Strip

Item Description

1 Roll: 5½" x 100' (139.7 mm x 30.5 m)

Item Number

W56RAC1870

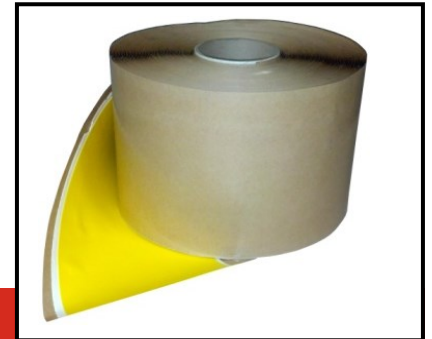

Product Information

Description:

QuickSeam Yellow Safety Strip is a nominal 30 mil (0.76 mm) yellow unsupported TPO membrane laminated to a 35 mil (0.89 mm), white cured seaming tape. The QuickSeam Yellow Safety Strip is acceptable to be used on UltraPly™ TPO Membrane, RubberGard™ EPDM Membrane and RubberGard EcoWhite™ EPDM Membrane. The QuickSeam Yellow Safety Strip is used for designating a safety perimeter around the roof edge, equipment and any other rooftop hazards.

Method of Application:

1. Use Single Ply Quick Prime Primer or Single Ply LVOC Primer and QuickScrubber™ Pad or QuickScrubber Plus Pad to clean and prime the membrane and metal mating surface(s).
2. Once the primer has dried completely, apply the QuickSeam Yellow Safety Strip to the membrane. Hand roll with a silicone roller to ensure adequate adhesion.
3. TPO QuickSeam products must be warmed and rolled to conform to any step-offs or angle changes.

Storage:

- Store indoors in original, unopened containers at temperatures between 60 and 80 °F (15.6 and 26.7 °C).
- Do not store on roof in direct sunlight or at temperatures above 80 °F (26.7 °C).
- When exposed to lower temperatures, restore to room temperature prior to use.

Shelf Life:

- Shelf life of one (1) year can be expected when stored in original container at temperatures between 60 and 80 °F (15.6 and 26.7 °C).
- Shelf life will be shortened if exposed to elevated temperatures.

Precautions:

Refer to Safety Data Sheet (SDS) prior to use.

LEED® Information:

Post Consumer Recycled Content: 0%
Post Industrial Recycled Content: 0%
Manufacturing Location: Michigan Center, MI

*NOTE: LEED® is a registered trademark of the U.S. Green Building Council.

TECHNICAL INFORMATION SHEET

QuickSeam™ Yellow Safety Strip

Product Packaging:

Roll: 5½" x 100' (139.7 mm x 30.5 m)

Carton: 1 Roll per Carton

Typical Properties

<u>Property</u>	<u>QuickSeam Tape Typical Performance</u>	<u>TPO Flashing Typical Performance</u>
Base:	Rubber Polymers	TPO
Color:	White	Yellow
Solvents:	None	None
Solids:	100%	100%
Specified Gravity:	98 ± 0.02 (H ₂ O = 1)	1.15 ± 0.05
Cured State:	Cured	N/A
Thickness:	0.035" + 0.002", - 0.005" (0.889 mm + 0.051 mm, - 0.13 mm)	0.030" (0.76 mm) ± 10%
Width:	5¾" - 0, + 1/16" (146 mm - 0, + 1.6 mm)	5½" (139.7 mm) + 0, - 1/8"
Length:	100' (30.5 m)	100' (30.5 m)

Please contact Firestone Technical Services Department at 1-800-428-4511 for further information.

This sheet is meant to highlight Firestone products and specifications and is subject to change without notice. Firestone takes responsibility for furnishing quality materials which meet published Firestone product specifications or other technical documents, subject to normal roof manufacturing tolerances. Neither Firestone nor its representatives practice architecture. Firestone offers no opinion on and expressly disclaims any responsibility for the soundness of any structure. Firestone accepts no liability for structural failure or resultant damages. Consult a competent structural engineer prior to installation if the structural soundness or structural ability to properly support a planned installation is in question. No Firestone representative is authorized to vary this disclaimer.