


**NOTES:**

1. REFER TO THE FIRESTONE WEBSITE FOR THE MOST CURRENT INFORMATION.
2. USE APPROPRIATE GENERAL PURPOSE SEALANT OR CUT EDGE TREATMENT WHERE APPLICABLE.
3. ALL EXTENDED WIND SPEED WARRANTIES REQUIRE BASE TIE-IN ATTACHED AT 12" O.C. (<99mph), 6" o.c. (>100mph).
4. FOR PARAPET WALLS CONSTRUCTED OF STUDS, EXTENDED WIND SPEED WARRANTIES BASE TIE-INS SHALL BE INSTALLED DOWN THROUGH THE DECKING, NOT INTO THE STUD WALL.
5. 20 YEAR MAX WARRANTY FOR ALL EXTENDED WIND SPEED WARRANTIES.
6. PEEL STOPS CAN BE COVERED WITH APPROPRIATE COVER STRIP MATERIAL OR BE BURIED WITHIN A SEAM DETAIL.

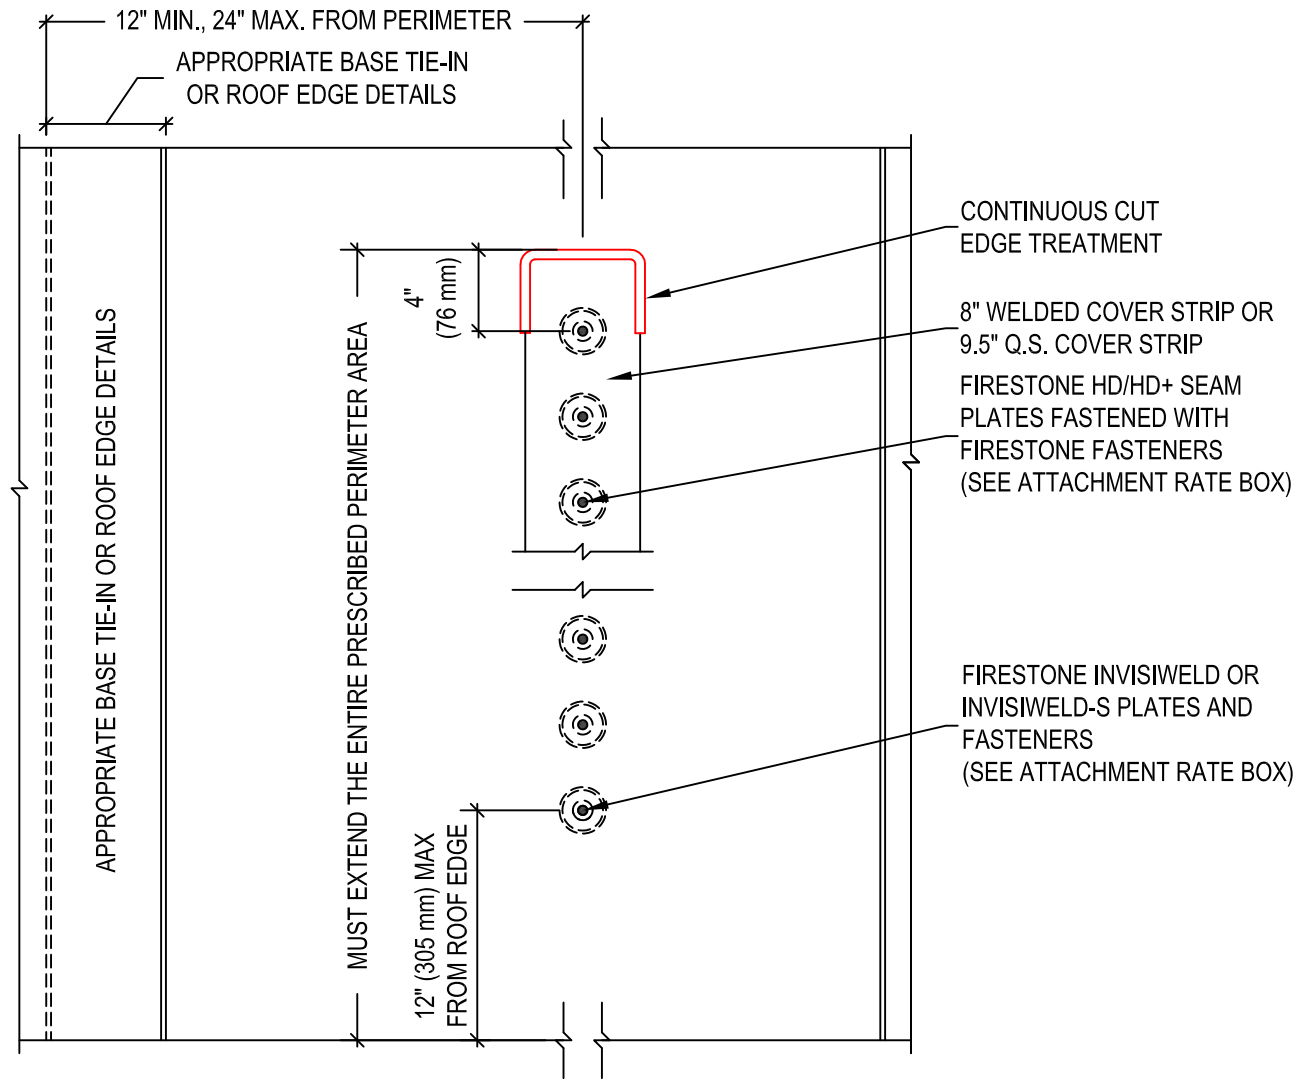

ATTACHMENT RATES	
HD FASTENERS:	
UP TO 99MPH	12" O.C.
100 MPH AND GREATER	6" O.C.
HD PLUS FASTENERS:	12" O.C.

**Firestone**  
Firestone Building Products

**ULTRAPLY TPO PEEL STOP EXAMPLE  
WITH STANARD PLATES OR INVISIWELD SYSTEM**

ULTRAPLY™ TPO

ACCEPTABLE SYSTEMS: Fully Adhered

MAXIMUM WARRANTY: **20 YEARS**

ISSUE / REVISION  
DATE:  
2/21/2018

DETAIL NO.  
**UT-PE-8**